


REV.	DESCRIPTION	DATE
A	RELEASE	Mar. 06, 2002
B	DRAW MODIFY	Jul. 11, 2003
C	DRAW MODIFY	Jul. 07, 2005

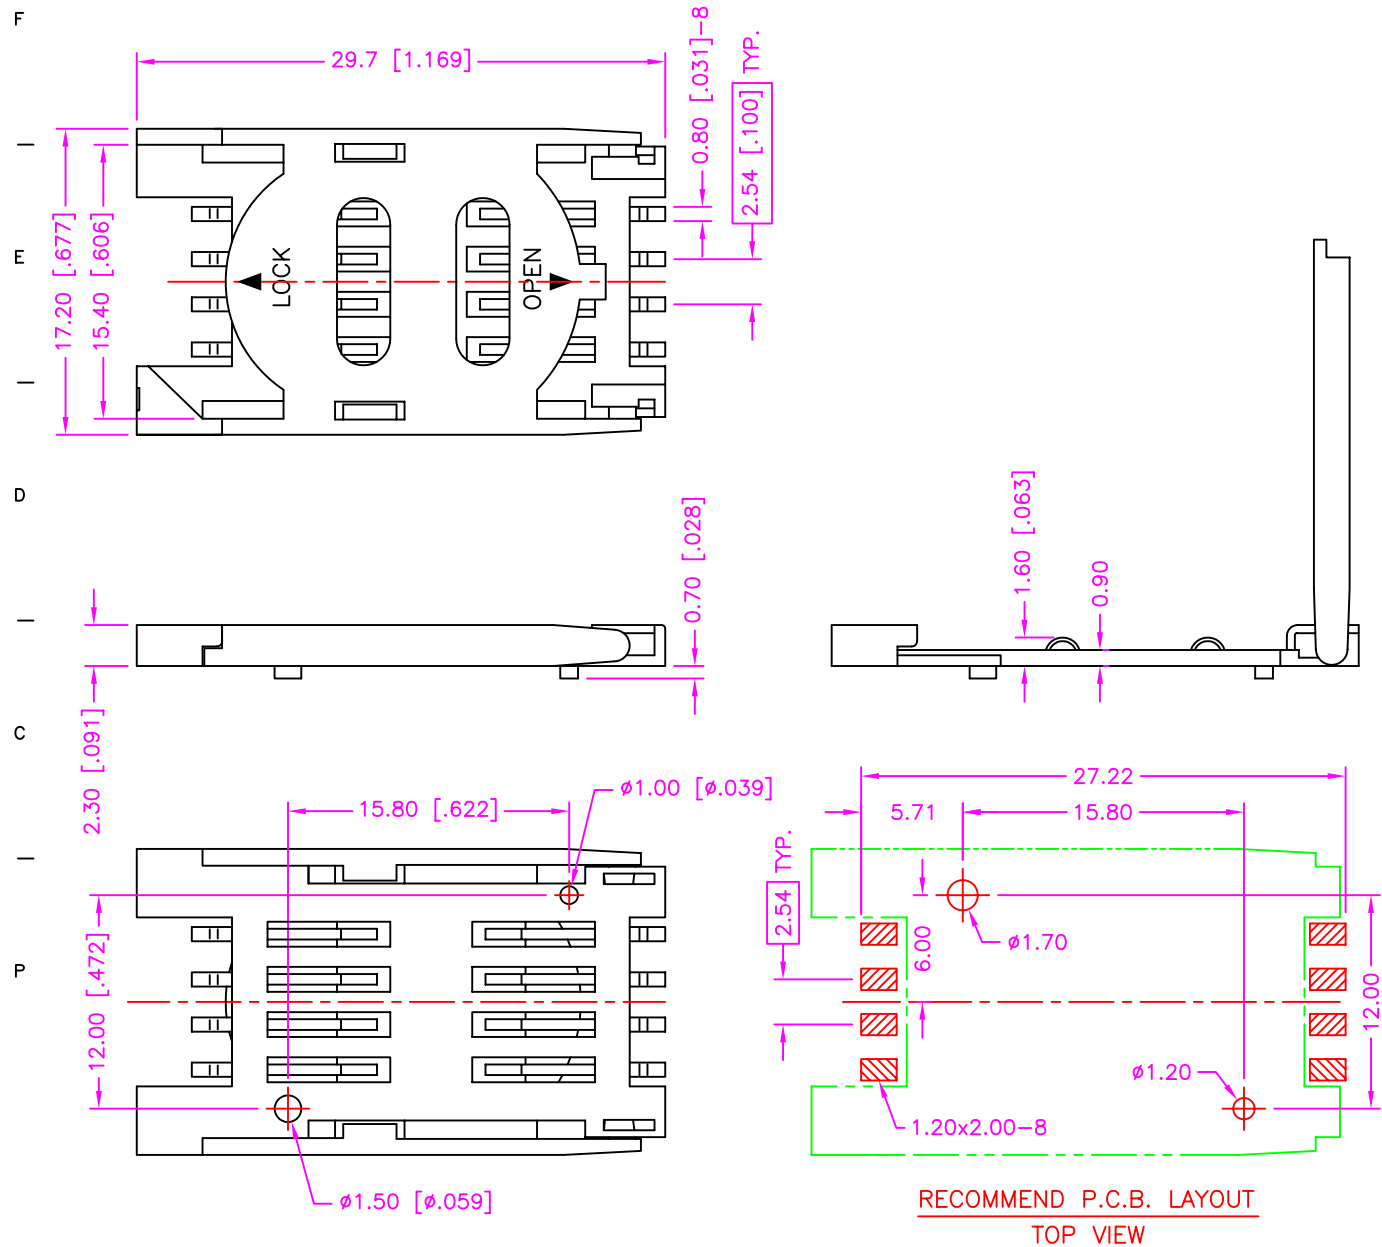


MATERIALS

- HOUSING : HI.-TEMP. PLASTIC (UL 94V-0), BLACK.
- TERMINAL : PHOSPHOR BRONZE, GOLD PLATING ON CONTACT AREA, TIN PLATING ON SOLDER TAIL.

SPECIFICATION

- CURRENT RATING : 0.5 AMP. MAX.
- DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
- INSULATION RESISTANCE : 1000M OHMS MIN. AT 500V DC.
- CONTACT RESISTANCE : 30m OHMS MAX.
- OPERATING TEMPERATURE : -25°C TO +85°C.
- MAX. PROCESSING TEMP. : 230°C FOR 30 ~ 60 SECONDS.
- DURABILITY : 5000 CYCLES.

ORDER INFORMATION :

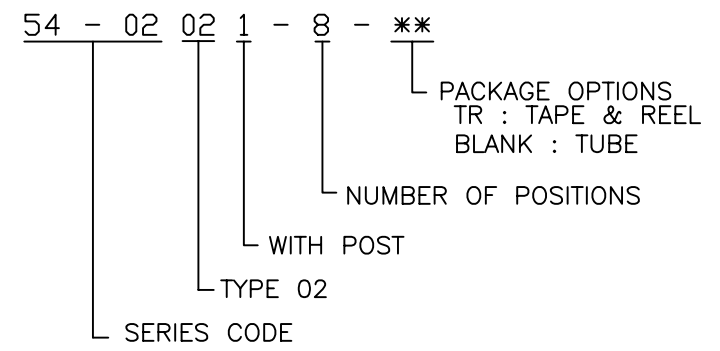

RECOMMEND P.C.B. LAYOUT
TOP VIEW

TOLERANCE		DRAWER	
.0=±.30 [.012]		CHECK	
.00=±.20 [.008]		APP'D	NAME
.000=±.XXX		PRODUCT SPEC.	SIM CARD READER CONNECTOR, 2.54mm
.0000=±.			DRAW NO. 54-0206
ANG.=±3'			
UNITS : mm [inch]		SCALE	SIZE
NONE		1 OF 1	A4
SHEET		REV.	
1 OF 1		C	08001